



IM-0750 Ice Cube Machine


Models

- IM-0750-AC IM-0750-AH



ICETRO IM-0750 ice machine on a IB-044 bin

*Ice Machine and Bin sold separately

- Up to 737lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- ENERGY STAR® qualified 
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- R-404A refrigerant

Ice Shape



Half Cube
 $\frac{3}{8}'' \times 1\frac{1}{8}'' \times \frac{7}{8}''$
 (.95 x 2.86 x 2.22 cm)



Cube
 $\frac{7}{8}'' \times \frac{7}{8}'' \times \frac{7}{8}''$
 (2.22 x 2.22 x 2.22 cm)

Factory Warranty

| | | |
|--------------------------|--------------|--------------|
| Parts & Labor | Parts | Parts |
| 3 YR | 5 YR | 5 YR |
| Ice Maker | Evaporator | Compressor |



Extend ice machine warranty 1 year by installing an IcePro 800 with ice machine.

* Applies only to new ice machines, at the time of original installation & start-up.

Specifications

BTU Per Hour:

14,558

Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

Ice Machine Electric

208-230/60/1

Minimum circuit ampacity:


Air-cooled: 15 *1ph*

Maximum fuse size:

Air-cooled: 25 *1ph*

Accessories

Bin Adapter
IBT-3048B
 Center Mount
 48" Bin



Bin-Stat Kit
IBO-150KIT

Recommended when ice machine is installed on soda dispenser.



Water Filtration


IcePro 800
 Reduces sediment and chlorine contaminants with the use of Citrine.






IM-0750 Ice Cube Machine


IM-0750 Air Cooled

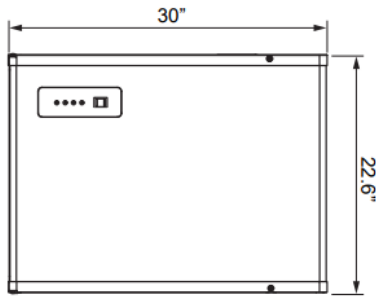

FRONT VIEW



SIDE VIEW

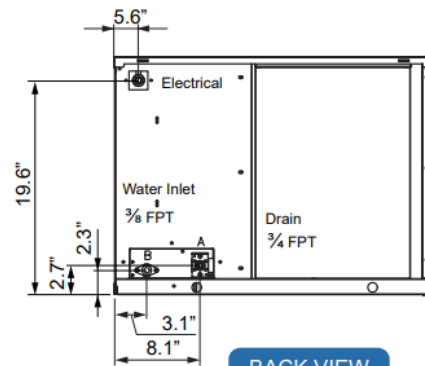

BACK VIEW

Specifications

| Dimensions | Width | Depth | Height | Weight |
|-----------------|-------|-------|--------|---------------------------------|
| IM-0750 Machine | 30" | 24.8" | 22.6" | 185.2 lbs(Net) 218lbs(Shipping) |

| Model | Ice Shape | Ice Production 24 Hours | | Power Usage kWh/100 lbs. @90°Air/70°F | Potable Water Usage/100 lbs. 45.4 kgs. of Ice |
|------------|-----------|-------------------------|--------------------|---------------------------------------|---|
| | | 70°Air/ 50°F Water | 90°Air/ 70°F Water | | |
| AIR COOLED | cube | 1 ph | 1 ph | 1 Ph | 15 Gal. |
| | | 737lbs 434kgs | 672 lbs 305 kgs | 5.59 | 15 Gal. |
| | half-cube | 737lbs | 672 lbs | 5.59 | 15 Gal. |
| | | 434kgs | 305 kgs | 5.59 | 15 Gal. |

