



# IM-0550 Ice Cube Machine


## Models

- IM-0550-AC     IM-0550-AH     IM-0550-WC     IM-0550-WH



ICETRO IM-0550 ice machine on a IB-044 bin

\*Ice Machine and Bin sold separately

- Up to 551lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- ENERGY STAR® qualified (air-cooled only) 
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & topvents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- R-404A refrigerant

## Ice Shape



**Half Cube**  
3/8" x 1 1/8" x 7/8"  
(.95 x 2.86 x 2.22 cm)



**Cube**  
7/8" x 7/8" x 7/8"  
(2.22 x 2.22 x 2.22 cm)

## Factory Warranty

<b>3</b> YR	<b>5</b> YR	<b>5</b> YR
Ice Maker	Evaporator	Compressor



Extend ice machine warranty 1 year by installing an IcePro 400 or 800 with ice machine.

\* Applies only to new ice machines, at the time of original installation & start-up.

## Specifications

### BTU Per Hour:

7,563

### Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPa) Max. 80 psi (551.1 kPa)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

## Ice Machine Electric

115/60/1

### Minimum circuit ampacity:

Air-cooled: 20 *1ph*

Water-cooled: 20 *1ph*

### Maximum fuse size:

Air-cooled: 25 *1ph*

Water-cooled: 25 *1ph*

## Accessories

### Bin-Stat Kit IBO-150KIT

Recommended when ice machine is installed on soda dispenser.



### Water Filtration


IcePro 400 or 800  
Reduces sediment and chlorine contaminants with the use of Citrine.






# IM-0550 Ice Cube Machine

## IM-0550 Air Cooled

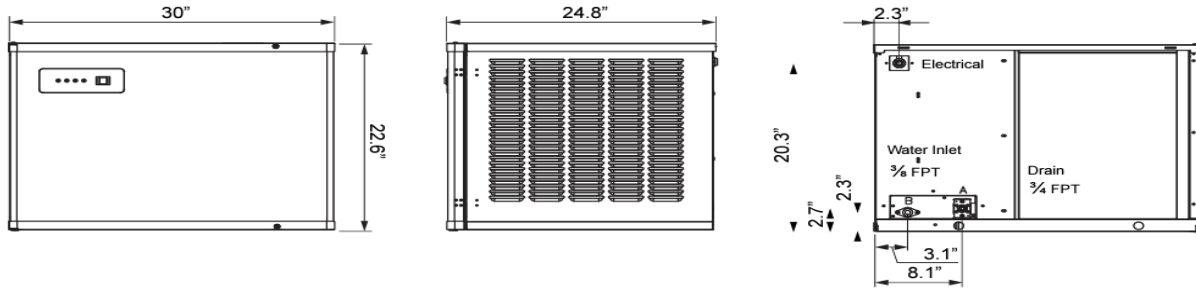

## IM-0550 Water Cooled

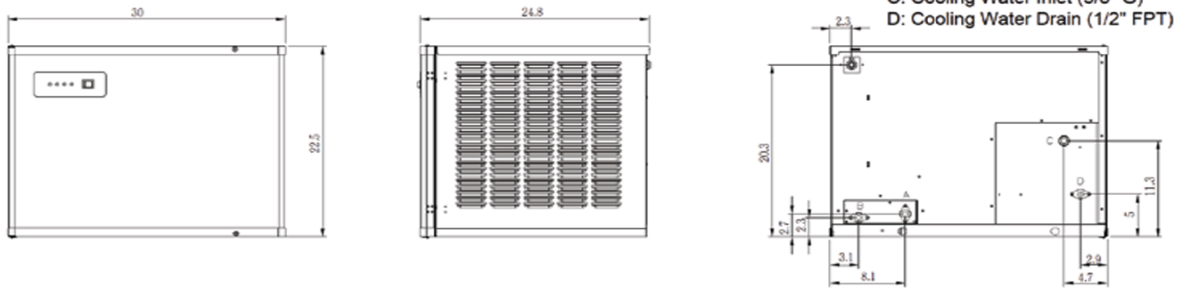

FRONT VIEW

SIDE VIEW

BACK VIEW

## Specifications

Dimensions	Width	Depth	Height	Weight
IM-0550 Machine	30"	24.8"	22.6"	162.3 lbs (Net) 192 lbs (Shipping)

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70°Air/ 50°F Water	90°Air/ 70°F Water		
AIR COOLED	cube	1 ph	1 ph	1 Ph	15 Gal.
		551 lbs	399 lbs	5.91	15 Gal.
	half-cube	551 lbs	399 lbs	5.91	15 Gal.
		250 kgs	181 kgs	5.91	15 Gal.
WATER COOLED	cube	547 lbs	483 lbs	4.53	15 Gal.
		249 kgs	219 kgs	4.53	15 Gal.
	half-cube	547 lbs	483 lbs	4.53	14 Gal.
		249 kgs	219 kgs	4.53	15 Gal.

